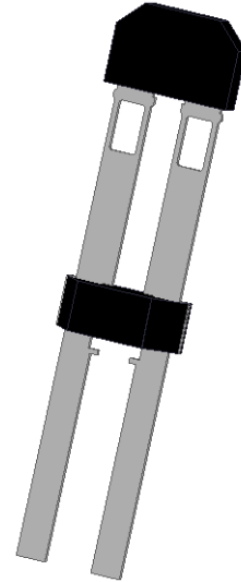

**Two-Wire High Accuracy Differential Speed Sensor IC
with Continuous Calibration**

Features

- Two-wire current interface
- High sensitivity
- South and North pole pre-induction possible
- Large air gap
- Single chip solution
- Wide operating temperature range

**Description**

The differential Hall Effect sensor SC9641 is designed to provide information about rotational speed to modern vehicle dynamics control systems and ABS. The output has been designed as a two wire current interface. Excellent accuracy and sensitivity are specified for harsh automotive requirements with a wide temperature range, high ESD and EMC robustness.

The regulated current output is configured for two-wire applications and the 2.0mm spacing between the dual Hall elements is optimized for fine pitch ring-magnet-based configurations.


The device is packaged in a 2-pin plastic SIP. It is lead (Pb) free, with 100% matte tin plated leadframe.

Device Information

Part Number	Packing	Mounting	Ambient, T_A	Marking
SC9641TS	Bulk, 500 pieces/bag	2-pin SIP	-40°C to 150°C	9641

Terminal Configuration and Functions


2-Terminal SIP
TS Package
(Top View)

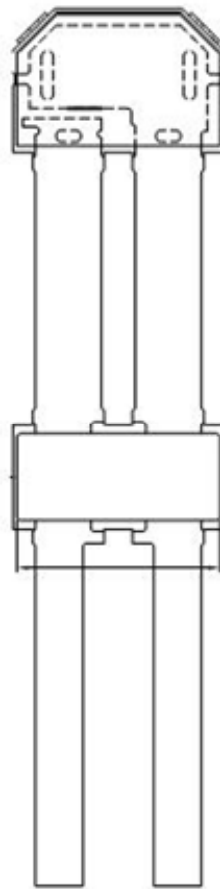

VDD GND

Terminal		Type	Description
Name	Number		
VDD	1	PWR	4.5V to 24 V power supply
GND	2	Ground	Ground

Functional Block Diagram

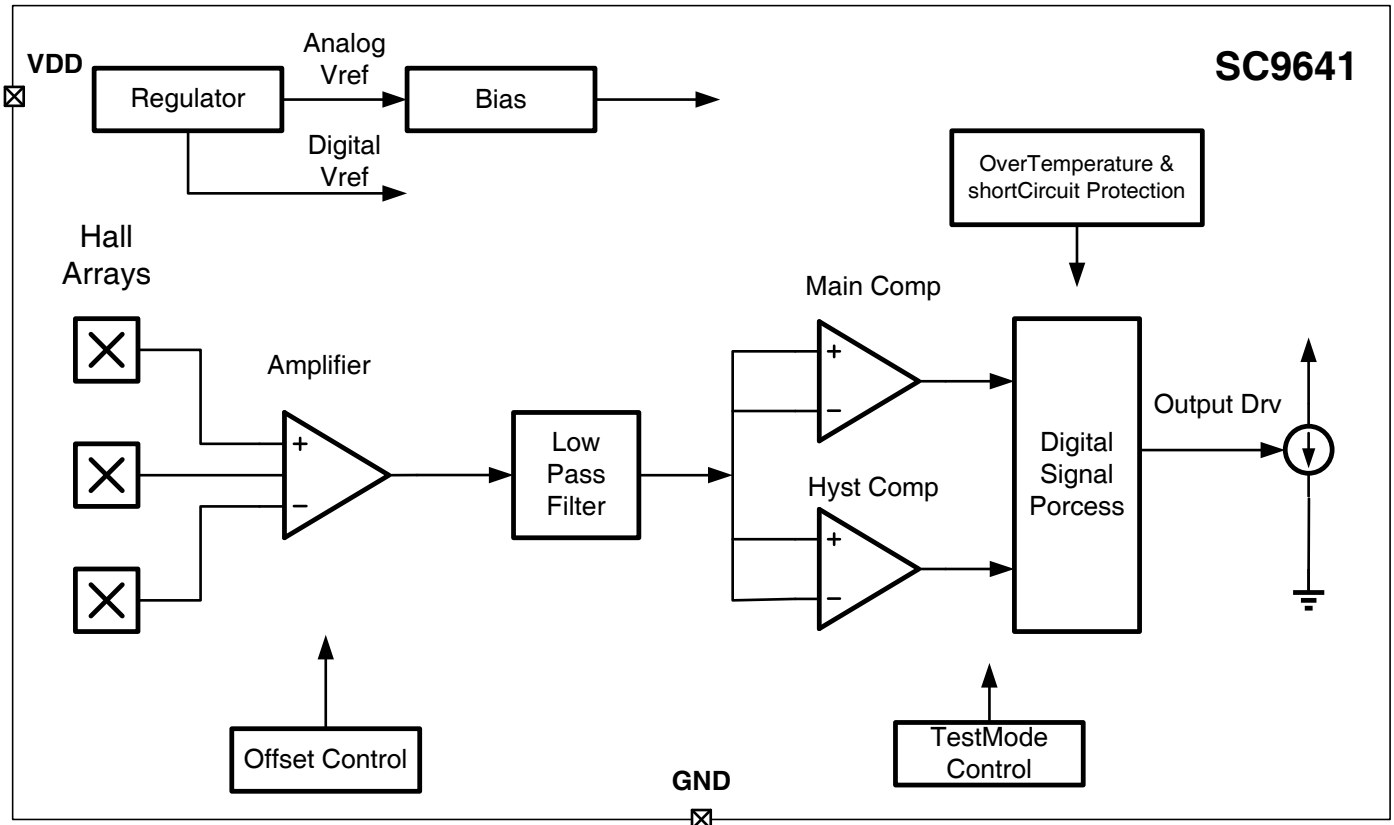

Functional Description

The SC9641 is an optimized Hall Effect sensing integrated circuit that provides a user-friendly solution for ring-magnet sensing in two-wire applications. This small package can be easily assembled used in conjunction with a wide variety of target shapes and sizes.

The integrated circuit incorporates a dual-element Hall Effect sensor and signal processing that switches to differential magnetic signals created by ring magnet poles. The circuitry contains a sophisticated digital circuit to reduce system offsets and to calibrate the gain for air-gap-independent switch points.

The regulated current output is configured for two-wire applications and the sensor is ideally suited for obtaining speed and duty cycle information in ABS (antilock braking systems). The 2.0 mm spacing between the dual Hall elements is optimized for fine pitch ring-magnet-based configurations. The package is lead (Pb) free, with 100% matte tin leadframe plating.

Absolute Maximum Ratings

over operating free-air temperature range

Parameter	Symbol	Min.	Max.	Units
Power supply voltage	V _{DD}	-0.5	30	V
Operating ambient temperature	T _A	-40	150	°C
Maximum junction temperature	T _J	-55	165	°C
Storage Temperature	T _{STG}	-65	175	°C

Note: Stresses above those listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ESD Protection

Human Body Model (HBM) tests according to: AEC-Q100-002

Parameter	Symbol	Limit Values		Units
		Min.	Max.	
ESD-Protection	V _{ESD}	-8	8	KV

Operating Characteristics

over operating free-air temperature range ($V_{DD}=12V$, unless otherwise noted)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{DD}	Operating voltage	$T_J < T_{J(max)}$	4.5	--	24	V
$I_{DD(Low)}$	Operating supply current	$V_{DD}=4.5V$ to 24 V	5.9	7.0	8.4	mA
$I_{DD(High)}$	Operating supply current	$V_{DD}=4.5V$ to 24 V	12.0	14.0	16.0	mA
R_{CUR}	Supply current ratio	$I_{DD(High)} / I_{DD(Low)}$	1.8	2	2.4	--
t_{po}^1	Power-on time	$V_{DD} > 4.5V$	--	3.8	9	mS
t_{settle}^2	Settling time	$V_{DD} > 4.5V$, $f=1kHz$	0	--	50	mS
$t_{response}^3$	Response time	$V_{DD} > 4.5V$, $f=1kHz$	3.8	--	59	mS
f_{cu}	Upper corner frequency	-3dB, single pole	15	--	--	kHz
f_{cl}	Lower corner frequency	-3dB, single pole	--	--	5	Hz
Magnetic Characteristics						
B_{Back}	Pre-induction		-500	--	500	mT
B_{OP}	Operated point	$f=1kHz, B_{diff}=5mT$	--	--	0	mT
B_{RP}	Released point	$f=1kHz, B_{diff}=5mT$	0	--	--	mT
B_{HYS}	Hysteresis		0.7	1.3	2.8	mT
ΔB_M	Center of switching points		-2.0	0	+2.0	mT

¹Time required to initialize device.

²Time required for the output switch points to be within specification.

³Equal to $t_{po} + t_{settle}$.

Recommended Application

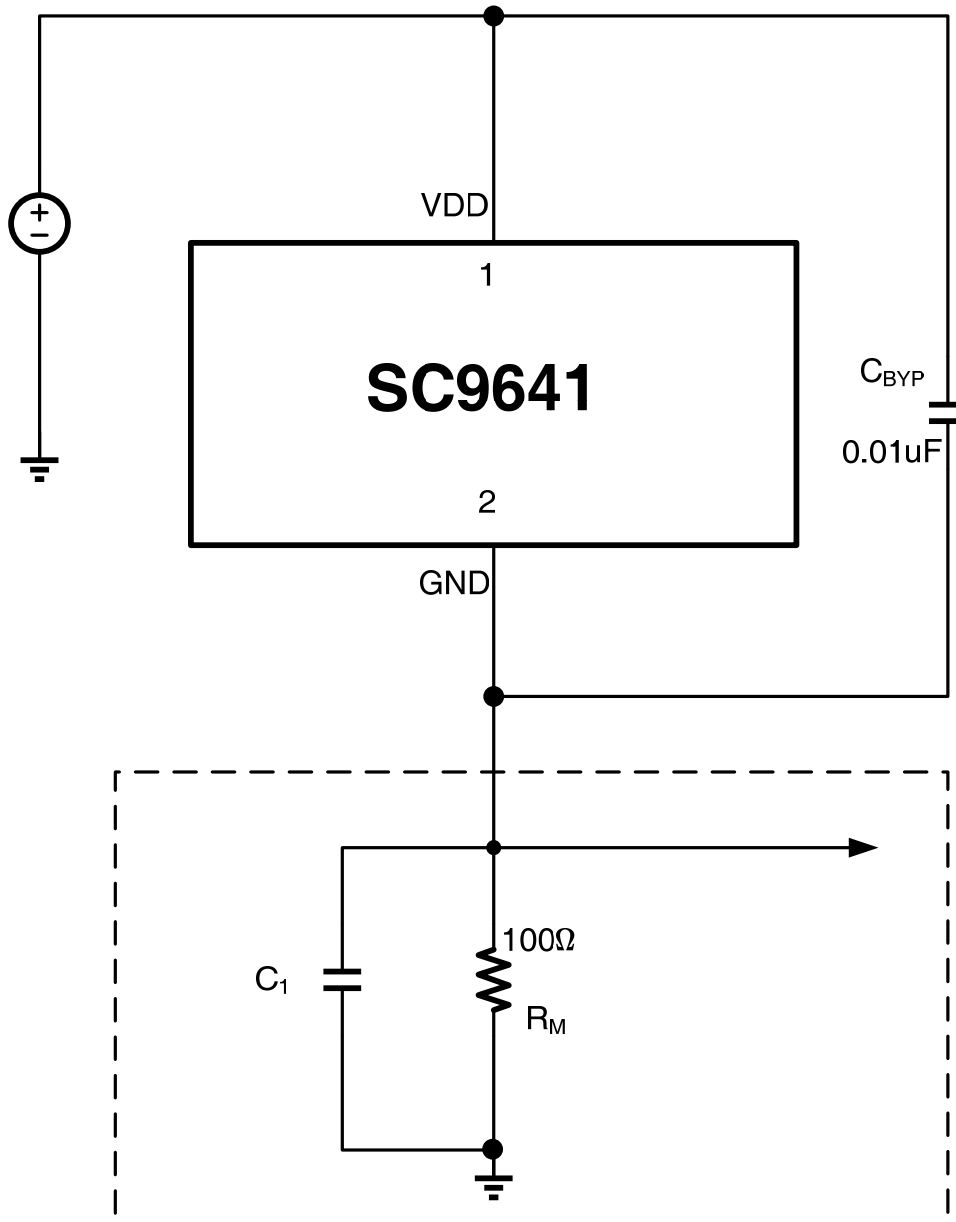


Gear Tooth Sensing

In the case of ferromagnetic toothed wheel application the IC has to be biased by the South or North pole of a permanent magnet which should cover both Hall probes

The maximum air gap depends on

- the magnetic field strength (magnet used; pre-induction), and
- the toothed wheel that is used (dimensions, material, etc.)

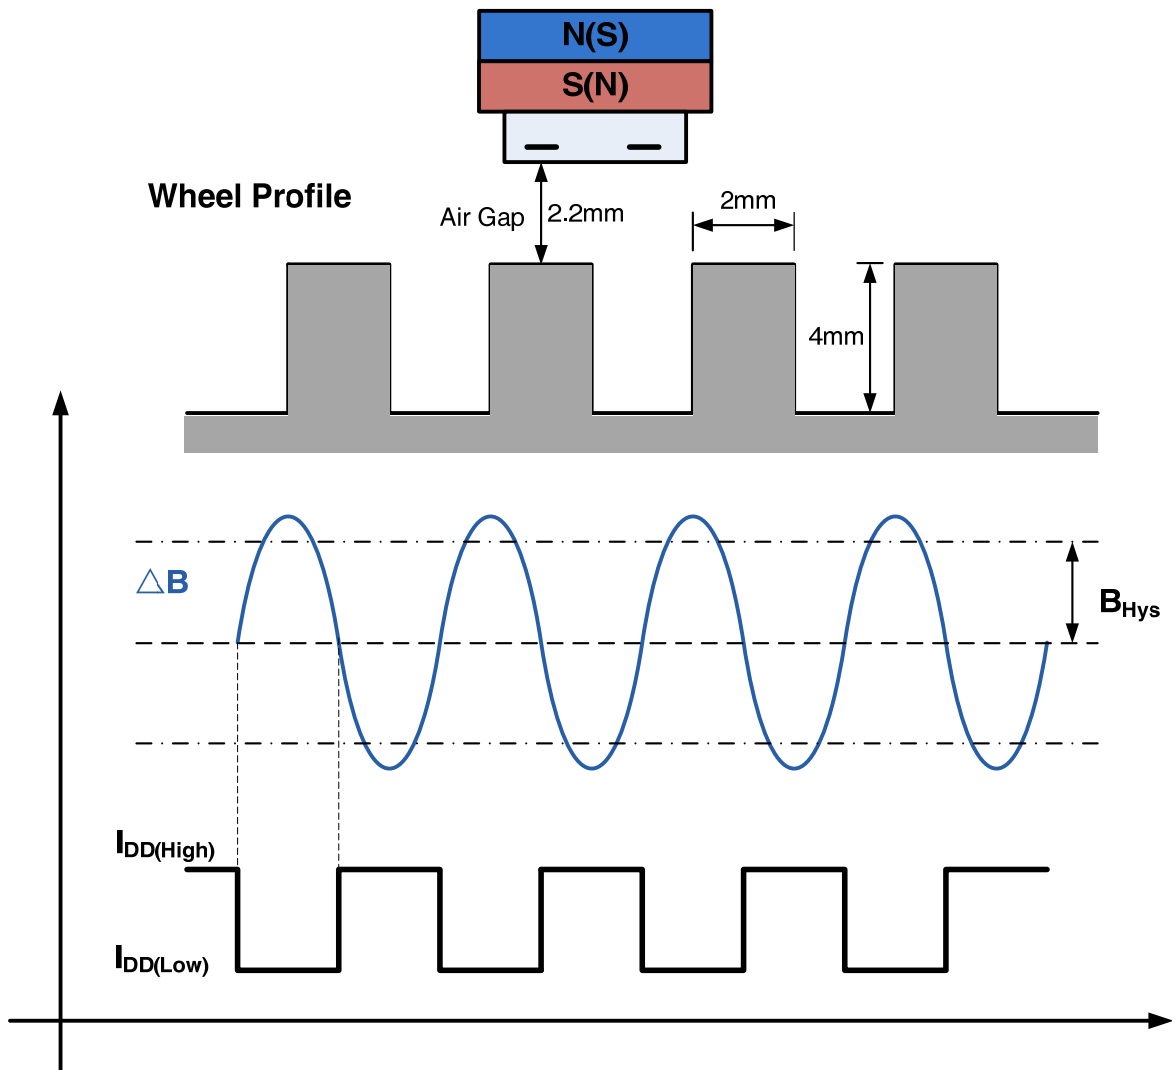

Package Designator

